



Deliver to:
Name:
Street:
Town: Postal code:
E-Mail:
Tel: Fax:

Deliver to:
Name:
Street:
Town: Postal code:
E-Mail:
Tel: Fax:

Order date:
Purchase order:
Number required:



Marked for:
Sunrise order no:

- ☐ Order
☐ Calculation
☐ Built 4 me

- = Standard
L = Extended delivery time
☐ = Cost option
☐ = No cost option

Customer service fax no.: +497253 980-222
Max. user weight: 85 kg

Art. no.: 843900001-000

USER WEIGHT kg
Mandatory information to ensure correct configuration

Please consult our colour catalogue, to review your colour choice at the end of the order form

Basic price

CLIENT MEASUREMENT

		Seat width in mm										
		220	240	260	280	300	320	340	360	380	400	
Seat depth in mm	240	○	○	○	○	○	○	○	○	○	○	+20 mm short frame ↓ long frame ↓ +40 mm Straight frame starting at 260 mm
	260	○	○	○	○	○	○	○	○	○	○	
	280	○	○	○	○	○	○	○	○	○	○	
	300	○	○	○	○	○	○	○	○	○	○	
	320	○	○	○	○	○	○	○	○	○	○	
	340	○	○	○	○	○	○	○	○	○	○	
	360	○	○	○	○	○	○	○	○	○	○	
	380	○	○	○	○	○	○	○	○	○	○	
	400	○	○	○	○	○	○	○	○	○	○	

Your rear seat height can only be between 0 mm and 120 mm below your front seat height:

i.e. rear seat height CANNOT be above front seat height

i.e. rear seat height CANNOT be more than 120 mm below front seat height

- More info, see first back page

4" & 5" solid, 4" & 5" soft roll and 5" & 6" soft solid are only available with 45 mm fork

		Front seat height in mm															
fork (length x width)		370	380	390	400	410	420	430	440	450	460	470	480	500			
4"	111 mm x 45 mm		○	○	○	○	○										
	115 mm x 45 mm (3)			○	○	○	○										
	111 mm x 32 mm	○	○	○	○	○											
	138 mm x 45 mm (1) (3)					○	○	○	○								
	174 mm x 45 mm (1) (2) (3)							○	○		○	○					
5"	111 mm x 45 mm				○	○	○										
	115 mm x 45 mm (3)				○	○	○	○									
	111 mm x 32 mm				○	○	○										
	138 mm x 45 mm (1) (3)						○	○	○								
	174 mm x 45 mm (1) (2) (3)								○	○	○	○	○				
6"	111 mm x 45 mm						○	○									
	115 mm x 45 mm (3)						○	○		○							
	138 mm x 45 mm (1) (3)						○	○		○	○						
	174 mm x 45 mm (1) (2) (3)									○	○	○	○	○			

		Rear seat height in mm															
Rear wheels		320	330	340	350	360	370	380	400	410	420	430	440	450	460	470	
20" (4)				○	○												
22"						○	○	○	○	○		○	○	○			
24"										○	○	○	○	○	○	○	

☐ **Lightweight Package** YNG090600
incl Proton wheel and lightweight sideguard

☐ **Safari Package** YNG090601
incl Aluminium sideguard with fender (YNG040212)
and Safari wheel lock (YNG060105)

- Please note the procedure of the measurement is from the back

- All measurements are in mm and without a cushion

- (1) only aluminium fork available
(2) only grey available
(3) fork compatible with additional drive
(4) only Proton wheels/Right Run tyres

For more information
visit our webpage
www.SunriseMedical.eu
© Sunrise Medical 2025

Please follow measuring method:

The following method is recommended on the basis of extensive practical experience.
Deviations are possible in individual instances


Seat width:

a) For the user:

Allow space of sideguard to pass vertically between hip and sideguard on each side (approx. 10 - 20 mm altogether)

b) On the wheelchair:

From outside frame tube to outside frame tube



Seat depth:

a) For the user:

When sitting upright: leave space for 2-3 fingers between front edge of seat upholstery and back of knee (approx. 30 - 60 mm). Care must be taken with adjustable upholstery

b) On the wheelchair:

From back tube to front of seat upholstery



Back height:

a) For the user:


Measured from the seat, including cushion, to **no more** than one finger (10 - 20 mm) below the lower shoulderblade.

Important! The back height depends on the degree of disability

b) On the wheelchair:

From seat tube to upper edge of backrest upholstery.

Note: The user's ability to sit upright has a major influence on the back height and it can therefore differ considerably



Lower leg length:


a) For the user:

With legs angled at right angles, from back of knee to bottom of shoe sole

b) On the wheelchair:

From front of seat to top of footrest.

Remember: to include the cushion height



Overall width:

Max. Width 700 mm
Max. Height 920 mm
Max. Length 930 mm

Weights:

Minimum weight: from 8.5 kg


Folded size:

Minimum width: ca. 310 mm

NOTES:


Max. seat height difference rear to front is 120 mm
No negative seat angle is possible
Manufacturing tolerances of +/- 10 mm

Product is crash tested according to ISO 7176-19 and therefore approved for transportation in a vehicle.
For transport without a user the chair must be safe clamped in the vehicle.


SEAT UPHOLSTERY																								
Seat sling																								
YNG020101	☒ 1 Utility bag			For more information about JAY please contact our customer service																				
YNG020102	☐ With two utility bags <i>(only from SW 340 mm)</i>																							
YNG020103	☐ One utility bag and one catheter bag <i>(only from SW 340 mm)</i>																							
YNG020104	☐ Without seat sling																							
For JAY Seating, see Jay order form																								
Seat cushion with cover, black																								
a) Foam composite Thickness: YNG020201 ☐ 30mmr YNG020203 ☐ 50mm <i>(medium)</i>																								
Seat accessories																								
YNG020301	☐ Positioning belt with lock																							
YNG020303	☐ Jay Fit belt 90° attachment <i>(attached to the seat rail)</i> <i>(starts with SW 260; use with cushion only)</i>																							
YNG020304	☐ Jay Fit belt 45° attachment <i>(attached to the seat rail)</i> <i>(starts with SW 260; use with cushion only)</i>																							
YNG020305	☐ Seat plate (for mounting of seat shell adapters, build in growth) <i>(only from SW 240 mm)</i>																							
SiMo - Seat and backrest system by Meybrand <i>(Seat and back sling not required)</i> SIM09000-999 ☐ Black (Cushion cover always black) SIM09000-1001 ☐ Red (Cushion cover always black) SIM09000-1000 ☐ Green (Cushion cover always black) SIM09000-1002 ☐ Red with design (Complete)																								
<table border="1"> <thead> <tr> <th>Backrest (range)</th> <th>225 - 275</th> <th>275 - 325</th> <th>325 - 375</th> <th>375 - 425</th> </tr> </thead> <tbody> <tr> <td>Back height set at (mm)</td> <td>☐ 225</td> <td>☐ 275</td> <td>☐ 325</td> <td>☐ 375</td> </tr> <tr> <td></td> <td>☐ 250</td> <td>☐ 300</td> <td>☐ 350</td> <td>☐ 400</td> </tr> <tr> <td></td> <td>☐ 275</td> <td>☐ 325</td> <td>☐ 375</td> <td>☐ 425</td> </tr> </tbody> </table>					Backrest (range)	225 - 275	275 - 325	325 - 375	375 - 425	Back height set at (mm)	☐ 225	☐ 275	☐ 325	☐ 375		☐ 250	☐ 300	☐ 350	☐ 400		☐ 275	☐ 325	☐ 375	☐ 425
Backrest (range)	225 - 275	275 - 325	325 - 375	375 - 425																				
Back height set at (mm)	☐ 225	☐ 275	☐ 325	☐ 375																				
	☐ 250	☐ 300	☐ 350	☐ 400																				
	☐ 275	☐ 325	☐ 375	☐ 425																				
BACKREST																								
Backrest frame																								
YNG030101	☐ Standard: Non angle adjustable (90°), non folding backrest																							
YNG030102	☐ Angle adjustable <i>(Only in combination with sideguard YNG040202)</i> ☐ 87° ☐ 90° ☐ 95° ☐ 100° ☐ 105°																							
B4Me only Additional lead time 10 days	☐ Build for me Option: Reclining back <i>(For seat depth 300 mm and above)</i> Infinite back recline from -3° to +20° (2) <i>(only in combination with sideguard YNG040201)</i>																							
Pushhandles																								
YNG030201	☐ Without pushhandles <i>(not in combination with half folding back)</i>																							
YNG030203	☐ Long																							
YNG030204	☐ Fold-down pushhandles <i>(only up from BH 350 mm)</i>																							
YNG030205	☐ Height-adjustable pushhandles <i>(only up from BH 250 mm)</i>																							
YNG030206	☐ Height-adjustable pushhandles side angled <i>(not in combination with drumbrakes)</i>																							
YNG030207	☐ JAY Hardware with height adj. pushhandles <i>(only up from BH 300 mm)</i>																							
YNG030208	☐ JAY Hardware with height adj. PH side angled																							
Backrest upholstery																								
YNG030306	☒ Standard backrest upholstery																							
YNG030316	☐ EXO Backrest sling, padded, adjustable, 1 accessory bag, black (EXO Evo version) Colour, binding tape: ☒ Black ☐ Orange ☐ Silver ☐ Red ☐ Blue																							
YNG030317	☐ EXO PRO Backrest, padded, adj., breathable spacer fabric, 1 accessory bag, black (EXO Evo version) Colour, binding tape: ☒ Black ☐ Orange ☐ Silver ☐ Red ☐ Blue																							
YNG030305	☐ Without back upholstery																							
Headrest																								
YNG030401	☐ Medium YNG030402 ☐ Large																							
YNG030403	☐ Stabiliser bar																							
(1): starting with SW 320 mm; reduces the seat depths of approx 10 mm because of the padding (2): not in combination with Safari wheel lock; Seat depth enlargement (50 mm); Standard backrest upholstery																								
For more information visit our webpage www.sunrisemedical.eu																								

YOUNGSTER 3 Seat heights and lower leg length


Seat height matrix - front seat height (in mm)

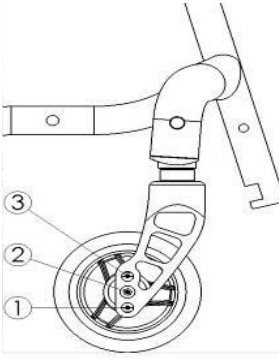	Fork Position	Castor size			
		4"	5"	6"	
	Fork (32/111 mm)	2 1	400 410	410 420	X X
	Fork (45/111 mm)	3 2 1	390 400 410	X 410 420	X X 430
	Fork (45/115)	3 2 1	400 410 420	410 ² 420 440	X 430 450
	Fork (45/138 mm)	3 2 1	420 430 440	430 440 450	430 450 460
	Fork (45/174 mm)	4 3 2 1	X 440 460 470	450 460 470 480	460 470 480 500
	Details:				
	* SH-details with 10 mm spacer between fork and frame - spacer could be mounted underneath the fork => reduced SH - 10 mm				
	* without cushion				
	* without seat angle (0°)				
	* X = No Go				
	² Not available with 5" soft rolls				


Seat height back (in mm) with rear wheels 20", 22" and 24"

		Axle plate position	rear wheel size		
			20"	22"	24"
		8	320	355	X
		7	330	37	X
		6	350	380	410
		5	X	400	425
		4	X	415	435
		3	X	430	445
		2	X	440	455
		1	X	455	470
Details		* measurements made with 1"-tyr * without seat angle (0°) * without cushion * X = No Go * without camber (0°)			

Distance between seat and handrim (outside tube)

		Axle plate position	rear wheel size		
			20"	22"	24"
		8	125	140	X
		7	110	130	X
		6	100	115	145
		5	X	100	130
		4	X	90	120
		3	X	80	105
		2	X	65	95
		1	X	50	80
Details		* without cushion * X = No Go * without camber (0°)			

Y3-LLL matrix; platform footrest, angle adjustable

	Fork position	4"-Castor		5"-Castor		6"-Castor	
		min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL
	Fork 111 mm	3	320	340	X	X	X
		2	320	350	X	X	X
		1	320	360	X	X	X
	Fork 115 mm	3	320	350	X	X	X
		2	320	360	X	X	X
		1	320	380	320	390	X
	Fork 138 mm	3	320	360	X	X	X
		2	320	380	320	390	X
		1	320	390	320	400	X
	Fork 174 mm	4	X	X	320	400	X
		3	320	400	320	410	320
		2	320	410	320	430	320
		1	320	420	320	440	320

Zippie Youngster 3

● = Standard ○ = No cost option □ = Cost option

R. Nr. €

ARMREST AND SIDEGUARDS			
Armrest			
YNG040101	□ Armrest height adjustable, short, screw-on	(only with YNG040201, YNG040202 and YNG040211)	
Sideguards			
YNG040201	□ Straight sideguard aluminium with cloth protection		
YNG040202	□ Aluminium sideguard for angle adjustable back at fixed angles with cloth protection		
YNG040204	□ Fender, composite, screw-on, back		
YNG040210	□ Mud guard (fender - covers the complete wheel)	(composite, black, screw on)	
YNG040203	□ Lightweight carbonfibre look sideguard with integrated clothing guard	(1)	
YNG040211	□ Straight sideguard aluminium with fender (Pair) - Tool height adj armrest possible		
YNG040212	□ Straight sideguard aluminium with fender (Pair) for Safari wheellock		
YNG040205	□ Plastic sideguards detachable (Quickie style)		
Sideguards options and accessories			
YNG040206	□ Height adjustable tray table, slide-on for SW 220 - 360 mm not SW 380 & 400 mm		
Therapy table flip-down for SW 260 - 400 mm			
Attachment: YNG040207 □ right-hand YNG040208 □ left-hand			

LEGREST & FOOTPLATES			
Platform footrest, angle adjustable (only in positioning 3 - back page 2)			
YNG050102	□ Composite board	(Abdu frame SW 260 - 400; Std 300 - 400)	
YNG050103	□ Carbon board	(Abdu frame SW 280 - 400; Std 320 - 400)	
YNG050115	□ Foot positioning plate		
YNG050106	● Platform footrest "Youngster 3"	(SW 380 & 400 with abduction is supplied w aluminium board)	
YNG050107	□ Locking system for spasticity for platform footrest		
YNG050108	□ Swing Away mechanism	(not with Platform footrest, angle adjustable)	
YNG050111	□ Divided footplate "Youngster 3" - composite	(not in SW 220 mm)	
Locking system for spasticity for divided footrest			
YNG050112	□ Right attachment		
YNG050113	□ Left attachment		
YNG050114	□ Lock for divided footrest (Right and left)		
YNG050101	□ Divided footplate Alu "Youngster3"	(starts w abdu frame SW 260, Std SW 300 mm)	
Clamp for platform footrest "Youngster3" □ Short (90 mm) □ Long (121 mm) (see matrix on back page 3)			
YNG050116 YNG050117 (not with Platform footrest, angle adjustable)			

Lower leg length (LLL) (in mm)			
○ 110 ○ 120 ○ 130 ○ 140 ○ 150 ○ 160 ○ 170 ○ 180 ○ 24 ○ 190 ○ 200 ○ 210 ○ 220 ○ 230 ○ 240 ○ 250 ○ 260 ○ 32 ○ 280 ○ 290 ○ 300 ○ 310 ○ 320 ○ 330 ○ 340 ○ 350 ○ 40 ○ 370 ○ 380 ○ 390 ○ 400 ○ 410 ○ 420 ○ 430 ○ 440			


FRAME (with smart and nice folding fixation and frame protection for the rear frame end and the axle plate)			
YNG010101	● Standard folding frame (straight)	(from SW 260 - 400 mm)	
YNG010102	○ Abduction folding frame	(from SW 220 - 400 mm)	


Seat depth enlargement (50 mm) (all measurements are in mm)			
YNG010201	□ Seat depth enlargement (50 mm) (2) (3) (4)		
Increases seat depth by 50 mm allowing better COG adjustment when used in combination with seat shells			
(not in combination with leight weight sideguard)			
(only in combination with adjustable upholstery)			

(1): not with combination cloth protection, armrest & plastic sideguard
 (2): not with Safari wheel-lock
 (3): only with YNG040201 & YNG040202
 (4): not with mud guard

For more information
 visit our webpage
www.sunrisemedical.eu

Y3-platform footrest "Youngster 3 " style


Footplate position 1 		Fork position	4"-Castor				5"-Castor				6"-Castor			
			Clamp short		Clamp long		Clamp short		Clamp long		Clamp short		Clamp long	
			min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL
Fork 111 mm		3	150	260	120	290	X	X	X	X	X	X	X	X
		2	150	260	120	290	150	260	120	29	X	X	X	X
		1	150	260	120	290	150	260	120	29	150	260	120	290
Fork 123 mm		3	150	260	120	290	150	260	120	29	150	260	X	X
		2	150	260	120	290	150	260	120	29	150	260	120	290
		1	150	260	120	290	150	260	120	29	150	260	120	290
Fork 138 mm		3	150	260	120	290	150	260	120	29	150	260	120	290
		2	150	260	120	290	150	260	120	29	150	260	120	290
		1	150	260	120	290	150	260	120	29	150	260	120	290
Fork 174 mm		4	150	X	X	X	150	260	120	29	150	260	120	290
		3	150	260	120	290	150	260	120	29	150	260	120	290
		2	150	260	120	290	150	260	120	29	150	260	120	290
		1	150	26	120	290	15	260	120	29	150	260	120	290

Footplate position 2 		Fork position	4"-Castor				5"-Castor				6"-Castor			
			Clamp short		Clamp long		Clamp short		Clamp long		Clamp short		Clamp long	
			min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL
Fork 111 mm		3	140	240	110	260	X	X	X	X	X	X	X	X
		2	140	240	110	260	140	240	110	260	X	X	X	X
		1	140	240	110	260	140	240	110	260	140	240	110	260
Fork 123 mm		3	140	240	110	260	140	240	110	260	140	240	X	X
		2	140	240	110	260	140	240	110	260	140	240	110	260
		1	140	240	110	260	140	240	110	260	140	240	110	260
Fork 138 mm		3	140	240	110	260	140	240	110	260	140	240	110	260
		2	140	240	110	260	140	240	110	260	140	240	110	260
		1	140	240	110	260	140	240	110	260	140	240	110	260
Fork 174 mm		4	140	X	X	X	140	240	110	260	140	240	110	260
		3	140	240	110	260	140	240	110	260	140	240	110	260
		2	140	240	110	260	140	240	110	260	140	240	110	260
		1	140	240	110	260	140	240	110	260	140	240	110	260


Footplate position 3 		Fork position	4"-Castor				5"-Castor				6"-Castor			
			Clamp short		Clamp long		Clamp short		Clamp long		Clamp short		Clamp long	
			min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL
Fork 111 mm		3	250	360	220	360	X	X	X	X	X	X	X	X
		2	250	370	220	370	250	350	220	380	X	X	X	X
		1	250	380	220	380	250	370	220	390	X	X	X	X
Fork 123 mm		3	250	370	220	350	250	350	220	380	X	X	X	X
		2	250	380	220	360	250	370	220	400	250	350	220	380
		1	250	390	220	390	250	410	220	410	250	360	220	400
Fork 138 mm		3	250	360	220	390	250	360	220	400	250	350	220	380
		2	250	400	220	400	250	400	220	410	250	370	220	400
		1	250	410	220	420	250	410	220	420	250	390	220	420
Fork 174 mm		4	X	X	X	X	250	420	220	420	250	380	220	420
		3	250	420	220	420	250	430	220	430	250	410	220	440
		2	250	430	220	430	250	440	220	440	250	450	220	450
		1	250	440	220	440	250	460	220	460	250	470	220	470

● = Standard ○ = No cost option □ = Cost option

		R. Nr.	€
Frame accessories (choose either tip assist or anti-tip tubes, not both)			
Tip assist (step tube)			
YNG010301	☐ Left ☐ YNG010302 Right		
YNG010305	☐ Pair		
YNG010303	☐ Crutch holder with Velcro (only in combination with tip assist)		
Anti-tip tubes, swing-away			
	☐ Anti-tip tubes, swing-away		
	☐ YNG010306 Left YNG010307 Right		
	☐ YNG010308 Pair		
YNG010309	☐ Transit wheel (not with anti tip and tip assist)		
PREPARATION FOR ATTITUDE ADD-ON BIKE (4)			
YNG090911	☐ Preparation for ATTITUDE, without ATTITUDE order (4) (docking pins assembled)		
YNG090912	☐ Preparation for ATTITUDE, with ATTITUDE order (4) (docking pins assembled; separate ATTITUDE order)		
FORK (compare with your choice on the first page)			
	☐ Fork Carbotecture® (only 111 mm)		
YNG080029	☐ Fork Aluminium		
STANDARD CASTOR (compare with your choice on the first page)			
YNG080201	☐ Solid (for 45 mm fork version only) (only for 4" & 5")		
YNG080202	☐ Soft solid (for 45 mm fork version only) (only for 5" & 6")		
Light ups			
YNG080203	☐ Solid (not available for 6")		
Castor with aluminium rim			
YNG080204	☐ Solid (only for 4" and 5")		
YNG080205	☐ Soft roll (for 45 mm fork version only) (only for 4" and 5")		
REAR WHEELS			
YNG070110	☐ without rear wheels		
YNG070101	☐ Straight spoked (only 22")		
YNG070102	☐ Cross spoked (pair) (only 22" & 24")		
YNG070103	☐ Design wheel (pair) (only 24")		
YNG070104	☐ Light weight wheel (2) (pair) (only 22" & 24")		
YNG070105	☐ Proton wheel (super light weight) (2) (pair)		
YNG070111	☐ Drum break wheels for attendant person (pair) (only 22" & 24")		
YNG070106	☐ Mountain Bike wheel (only with 24", mountainbike tyres & aluminium rim, black coated)		
YNG070107	☐ Additional mountain bike wheel pair (only with 24" & mountainbike tyres)		
One-arm drive with quick-release axle, one-arm brake not included (3)			
YNG070108	☐ Left YNG070109 Right		
TYRES (choose only one tyre type)			
YNG070201	☐ Right Run		
YNG070202	☐ Solid tyres (1) (only 22" & 24")		
YNG070112	☐ Schwalbe One (only 24")		
YNG070205	☐ Marathon plus evolution (puncture proof) (only 24")		
YNG090163	☐ Spares-kit: 1 extra tyre (same as on the chair) and 1 extra inner tube (not with solid tyres)		
HANDRIM			
YNG070301	☐ Aluminium silver anodized (2)		
YNG070302	☐ Aluminium silver powdercoated (2)		
YNG070303	☐ Coloured aluminium pushrim, colour code:		
YNG070304	☐ Stainless steel (only 22" & 24")		
YNG070305	☐ Titanium (only 22" & 24")		
YNG070306	☐ Titanium clear powdercoated (only 22" & 24")		
YNG070307	☐ Supergrip (only 22" & 24")		
YNG070308	☐ Maxgrepp (only 22" & 24")		
Hand rim mounting YNG070401 Standard = 17mm YNG070402 Wide = 27mm (Not with Maxgrepp)			
YNG070403 ☐ Close = 7mm (only with stainless steel; not in combination with Spinergy, Proton and Lightweight Wheels and stainless steel Handrim, Not with Maxgrepp)			
YNG070309	☐ Handrim cover (only 22" & 24")		
WHEEL CAMBER (choose only one option)			
YNG070501	☐ 0°		
YNG070502	☐ 1°		
YNG070503	☐ 2°		
YNG070504	☐ 3°		
YNG070505	☐ 4°		
Quick release axle			
YNG070506	☐ Std		
YNG070507	☐ Quad		
(1): not with Lightweight and Proton		For more information visit our webpage www.sunrisemedical.eu © Sunrise Medical 2025 Page 4/5	
(2): not with handrim mounting wide for Lightweight and Proton wheels			
(3): no colour coat, no camber adjustment, no drum brakes. Only with cross-spoked rear wheel available min. SW = 279			
(4): not with short frame in combination with 24" wheels, not with knee-lever wheel-lock			



ARMREST AND SIDEGUARDS

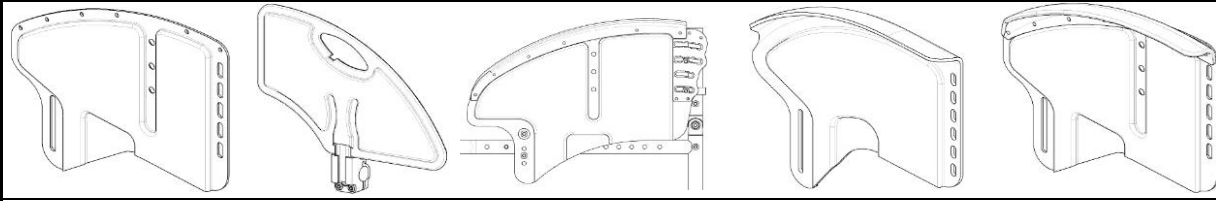


YNG040201

YNG040205


YNG040202

YNG040203

YNG040204

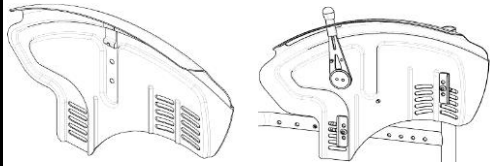

LEGREST & FOOTPLATES

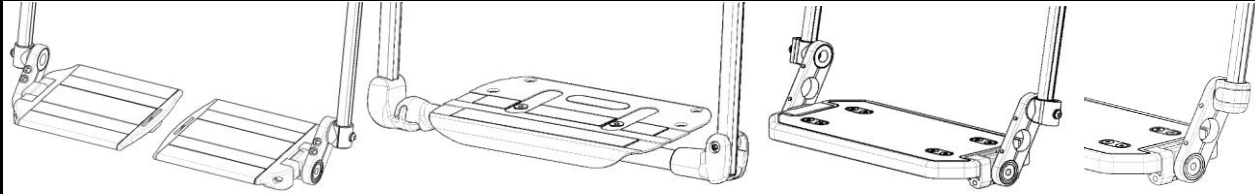


YNG050101

YNG050102 / YNG050103

YNG050106


YNG050108

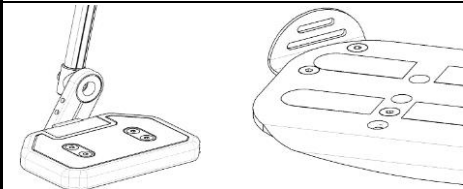

YNG050111

YNG050115

WHEEL LOCKS

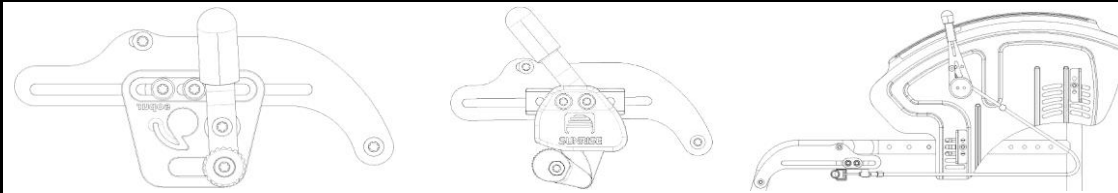


YNG060101

YNG060102

YNG060105


FRAME

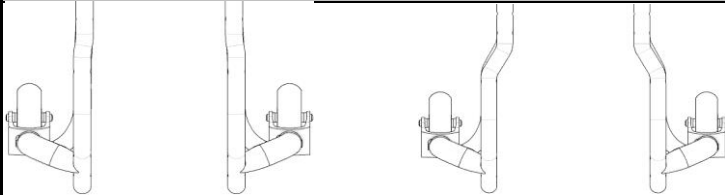

YNG010101

YNG010102


BACKREST



YNG030101

B4me

Seat depth growth



YNG010201

Zippie Youngster 3

● = Standard C = No cost option □ = Cost option

						R. Nr.	€
Spoke guard (only available in 22 & 24")							
YNG070601	□ Transparent						
	YNG070614	□ Galactica	YNG070625	□ Cheese			
YNG070604	□ Princess		YNG070626	□ Jungle Fever			
YNG070605	□ Happy Lions						
YNG070606	□ Monkeys	YNG070617	□ Pirates	YNG070628	□ Feather		
YNG070607	□ Oriental						
YNG070608	□ Superhero	YNG070619	□ Graffiti	YNG070630	□ Chrome wheel		
YNG070609	□ Hot wheels	YNG070620	□ Basketball	YNG070631	□ Basketball 2		
YNG070610	□ Pool	YNG070621	□ Flying water	YNG070632	□ Space		
YNG070611	□ Silk						
YNG070612	□ Tiger	YNG070623	□ Zebra	(see NEW Spokeguard brochure)			

WHEEL LOCKS				(choose only one option)			
YNG060101	☐	Standard wheel lock					
		Knee lever wheel lock					
YNG060104	☐	angled to the inside	YNG060102	☐	angled to the outside		
YNG060105	☐	Safari wheel lock (Wheel lock integrated into sideguard)					
YNG060106	☐	Attendant wheel lock with Safari wheel lock			(incl. YNG060105)		
YNG060107	☐	Drumbrake (for care person, quick-release axle)			(only 22" & 24")		
Wheel lock accessories							
YNG060201	☐	Extension for knee lever wheel lock, slip-on, swing-away			(only on kneeleaver whl)		

ACCESSORIES							
	● Tool kit						
YNG090101	□ High pressure pump						
YNG090102	□ Air pump						
YNG090103	□ Back pack						
YNG090104	□ Net back bag						
YNG090107	□ Mobile phone bag						



COLOURS							
	Frame	Handrim	Hub/rim		Frame	Handrim	Hub/rim
02 Brilliant Silver	○	□		24 Tutti Frutti Orange	○	□	
03 Silver matt	○	□		27 Graphitmetallic	○	□	
06 Sun Yellow	○	□		29 Black	○	□	
14 Blue	○	□	□	31 Matt black	○	□	
15 Brilliant Marine	○	□		32 Signal white	○	□	□
16 Matt Marine	○	□		33 Pink	○	□	□
19 Brilliant Purple	○	□		34 Dark chocolate metallic	○	□	
21 Red Ruby	○	□		35 Skyblue	○	□	
22 Brillant Red	○	□	□	36 Cyan-Metallic	○	□	
23 Matt Red	○	□	□	37 Marsred	○	□	
				40 Kiwi	○	□	
				41 Flamingo-Glitter	○	□	
				42 Matt-Anthraxit	○	□	
				46 Mamba Green (new)	○	□	

Anodized colour package for fork and axle plate			
YNG090507	Silver Matt	□	
YNG090508	Orange	□	
YNG090509	Black	●	

Comments for special build:	



Zippie Youngster 3 - Basic Price	
Option price	
Share of Packaging	
Exclusive VAT	
VAT.	
Total Price	€

Sunrise Medical Customer Service Address: Kahlbachring 2-4, D-69254 Malsch/Heidelberg Tel. +497253 980-0 Fax. +497253 980-222		For more information visit our webpage www.sunrisemedical.eu © Sunrise Medical 2025 Page 5 / 5
---	--	--

E-mail: export@sunrisemedical.de
 Website: sunrisemedical.eu